




MD-QUAD

Miniature (3G/HD/SD)-SDI QUAD SPLIT
WITH (3G/HD/SD)-SDI and HDMI OUTPUTS

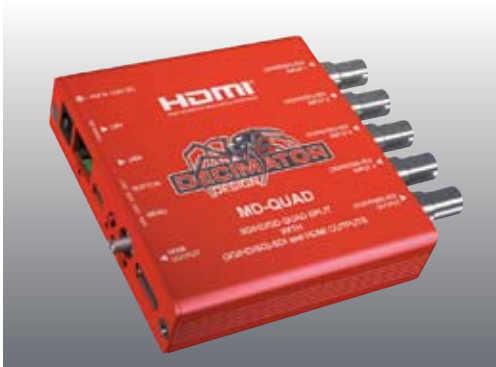

PRODUCT FEATURES

- Low cost miniature (3G/HD/SD)-SDI 4 to 1 Quad Split or 4 to 1 input multiplexer
- Selectable output format in Quad-Split mode
- Low latency buffering for each input allowing non-synchronous inputs
- Linked (3G/HD/SD)-SDI and HDMI outputs
- 4 x (3G/HD/SD)-SDI inputs with auto detection (26 Formats supported in total)
- Each quadrant is independent of the others, allowing any 3G/HD/SD format of any frame rate to be displayed simultaneously
- Variable aspect ratios per quadrant
- All 4 inputs can be displayed simultaneously on a single output
- Pass-Through mode allowing any of the 4 inputs to be selected for output
- In Pass-Through mode the selected input is passed through to both the (3G/HD/SD)-SDI and HDMI outputs
- On-Screen 20 character IDs (UMDs) for each input
- A single tallies for each input is available from the GPI
- An extensive selection of user controllable functions via an easy to use rotary encoder for menu selection. LEDs and a push button can then be used for status and control
- USB port for control and updates
- GPI on RJ-45 for remote switching
- Locking DC Power Socket
- The following is included with the unit:
Power Supply, HDMI Cable, USB Cable and Mounting Bracket

SPECIFICATIONS

VIDEO FORMATS	3G:SMPTE 424M@2.97 and 2.967Gb/s • 1080p@60/59.94/50Hz HD:SMPTE 292M/274M/296M@1.485 and 1.435Gb/s • 1080i@60/59.94/50Hz • 1080p/psf@30/29.97/25/24/23.98Hz • 720p@60/59.94/50/30/29.97/25/24/23.98Hz SD:SMPTE 259M@270Mb/s • 625i50 • 525i59.94	MENU OPTIONS	• Input status for all 4 inputs • Output format • Output selection of Quad Split or input 1, 2, 3 or 4. • Output aspect and type of 16:9 or 4:3 at either 90 or 100% of screen size • Individual aspect format for each input of Same as output, Letter-box or Pillar-box • Border Enable • Quad split mode reference of either Free-run or input 1
INPUTS	• Input Equalization > 100M using Belden 1694A • USB for control and updates • GPI on RJ-45	OUTPUTS	• 1 x 10-bit (3G/HD/SD)-SDI Re-clocked • HDMI
LED STATUS	• Power • 4 x Signal lock and rate	DIMENSIONS	90mm x 94mm x 23mm (3.5" x 3.7" x 0.9")
POWER	• +5V to +24V DC, 6 Watts • Positive Centre Pin		

DISTRIBUTED BY:

Symbiosis EU -
www.symbiosis.eu



www.decimator.com
FUTURE-PROOF SOLUTIONS

Copyright © 2010 DECIMATOR DESIGN PTY LTD MD-QUAD BROCHURE V1.1